



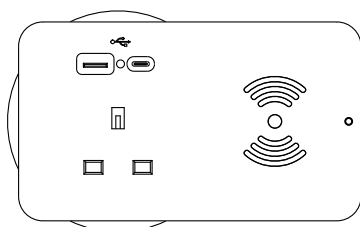

In-desk socket with USB charger

1 x UK Power with 2.4A USB-A & 3A USB-C (4.2A shared)
+ 10W wireless charging

Model: SOU/P-ID-IOND-1DFCAC-W (WHITE)

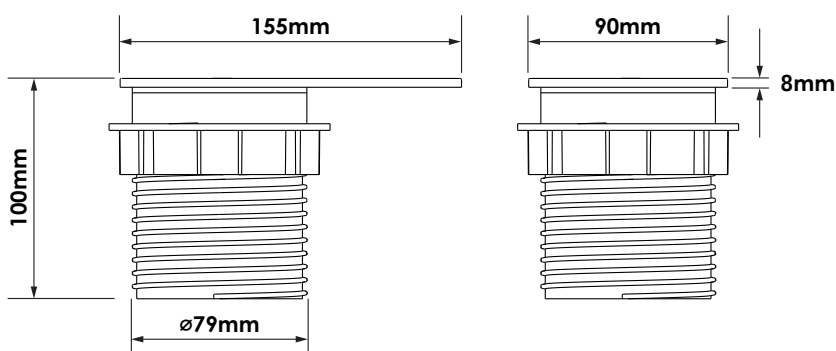

Rating	220-240V~, 50/60Hz, MAX 3.5A
Max Power	TOTAL LOAD MUST NOT EXCEED 3.5A 840W
Cable	0.8m Drop Lead H05VV-F 3G1,5 to GST18 type plug
Socket Outlet	1 x UK Power
2x USB Outlet	4.2A Dual Fast Charge USB USB Type A: 2.4A, USB Type C: 3A (4.2A shared) Power charging indicator
Wireless charging	10W, Power charging indicator
Cut out	80mm
Overload	3.5A overload located in the base

Important



Care and Maintenance: Periodically clean the units by first disconnecting the power and then clean using a soft damp cloth. Do not use harsh chemical solvents or detergents. Dry immediately with a soft dry cloth.



In-desk socket with USB charger

1 x UK Power with 2.4A USB-A & 3A USB-C (4.2A shared)
+ 10W wireless charging

Model: SOU/P-ID-IOND-1DFCAC-B (BLACK)

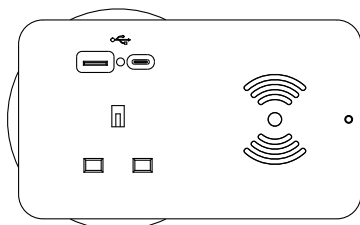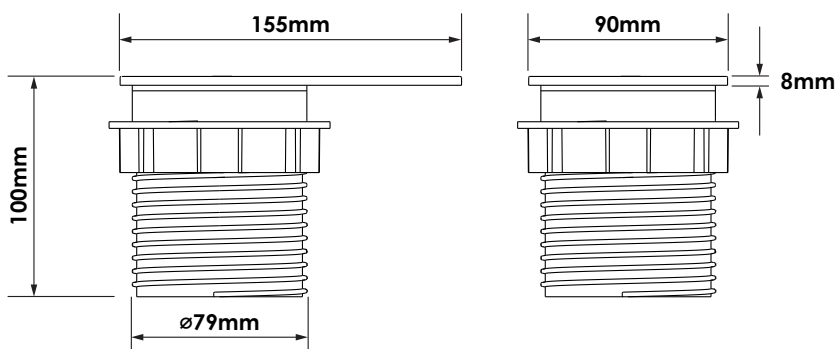

Rating	220-240V~, 50/60Hz, MAX 3.5A
Max Power	TOTAL LOAD MUST NOT EXCEED 3.5A 840W
Cable	0.8m Drop Lead H05VV-F 3G1,5 to GST18 type plug
Socket Outlet	1 x UK Power
2x USB Outlet	4.2A Dual Fast Charge USB USB Type A: 2.4A, USB Type C: 3A (4.2A shared) Power charging indicator
Wireless charging	10W, Power charging indicator
Cut out	80mm
Overload	3.5A overload located in the base

Important

Care and Maintenance: Periodically clean the units by first disconnecting the power and then clean using a soft damp cloth. Do not use harsh chemical solvents or detergents. Dry immediately with a soft dry cloth.